



## DS-2CE16D9T-AIRAZH

2MP CMOS Motorized Vari-focal IR Bullet Camera


### Key features:

- 2MP CMOS sensor
- HD1080p video output
- 0.1Lux @ (F1.2,AGC ON), 0 Lux with IR
- 5-50mm motorized VF lens, auto focus
- True Day/Night
- OSD menu, 3D-DNR, slow shutter, SMART IR
- Up the Coax(HIKVISION-C, Pelco-C protocol)

### Order Model:

DS-2CE16D9T-AIRAZH

### Dimension:

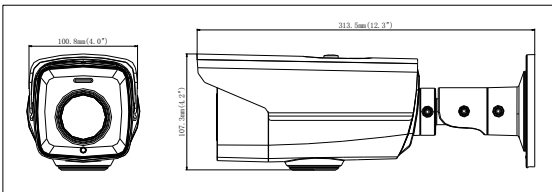

### Accessories:



DS-1275ZJ

Vertical Pole Mount



DS-1280ZJ-S

Junction Box

### Parameters:

Model	DS-2CE16D9T-AIRAZH
Parameters	2MP CMOS Motorized Vari-focal IR Bullet Camera
<b>Camera</b>	
Image Sensor	2.0Mega Progressive Scan CMOS
Signal System	PAL/NTSC
Effective Pixels	1956(H)×1266(V)
Min. illumination	0.01Lux @ (F1.2,AGC ON),0 Lux with IR
Shutter Time	1/25(1/30)sec~ 1/50,000sec
Lens Mount	5-50mm motorized VF lens
Day & Night	ICR
Angle Adjustment	Pan: 0°~360°; Tilt:0°~ 90°; Rotate: 0°~360°
Synchronization	Internal synchronization
WDR	120dB
Video Frame Rate	1080P@25/30fps
HD Video Output	1 turbo HD output
CVBS Output	1Vp-p Composite Output(75Ω/BNC)
S/N Ratio	>62dB
<b>Menu</b>	
Camera ID	On/off (15 characters, position programmable)
AGC	Support
D/N Mode	Color/BW/EXT
White Balance	ATW/ AWC-SET/ Manual
Privacy Mask	On/Off, maximum 8 zones
Motion Detection	On/Off, maximum 4 zones
BLC	Support
Anti-flicker	On/off
Language	Chinese/ English
	Eclipse, Digital noise reduction, Digital zoom(62x), Slow shutter, Mirror, Defog, Defect pixel correction, SMART
White Balance	D-ZOOM
Scene	Indoor/ Outdoor/ Indoor1/ LOW-LIGHT
<b>General</b>	
Working Temperature/Humidity	-40 °C – 60 °C (-40 °F – 140 °F) Humidity 90% or less (non-condensing)
Power Supply	AC24V±15%/ DC12V±15% Heater is available with 24VAC only
Power Consumption	Max. 11W(heater off) Max. 20W(heater on)
Weather Proof Ratings	IP67
IR Range	100-110m
Communication	Turbo HD output: HIKVISION-C protocol CVBS output: Pelco-C(need UTC controller)
Dimensions	313.5*100.8*107.3
Weight(approx.)	1700g